




DT-8819 Non-contact InfraRed Thermometer

- Unique flat surface, modern housing design
- Built-in laser pointer
- Backlighting display
- Fixed emissivity(0.95) covers 90% of surface applications
- Narrow 12:1 field of view (at 12 " distance, measure 1 " target)
- Automatic selection range and Resolution 0.1° up to 200°, 1° over 200°
- Automatic Data Hold
- Auto Power Off

SPECIFICATIONS:

Measuring Range	Resolution:	Basic Accuracy
-50.0°C ~ 750.0°C	0.1° up to 200°,	±1.5%±2°C or ± 4°F
-58°F ~ 1382°F	1° over 200°	

Distance(D) to Spot Size(S) D:S=12:1

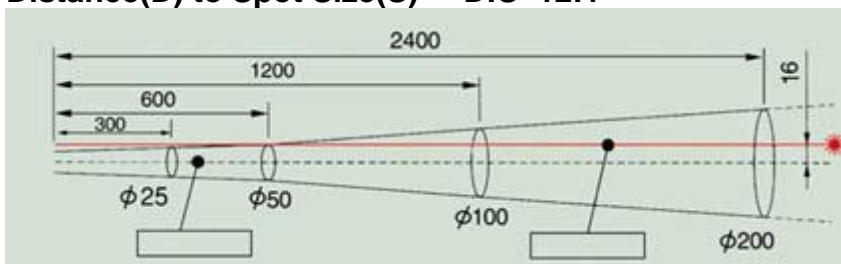

(Unit:mm)